

SYR OCEANIC BIRMFILTER

i-Lex 269 BIRMFILTER

GENERAL CONDITIONS

Connection inlet – outlet	: DN 20 OR DN 25
Connection waste water	: 3/4
electricity	: 230-12 V/50 Hz
power	: 24 W
minimal pressure	: 2 bar
maximal pressure	: 7 bar
average pressure loss	: 1.1 bar
maximal water temperature	: 43 °C


CONTENT

Type	: 25 % gravel – 75 % Birm
Life time of product	: depending on incoming water quality

REGENERATION

Start	: at 2AM
Time of regeneration	: maximal 45 minutes
Chronometrique	: 4 days (interval to be corrected if needed)
By-pass	: HWB (none treated water during regeneration)

Dimensions (in cm) TOP

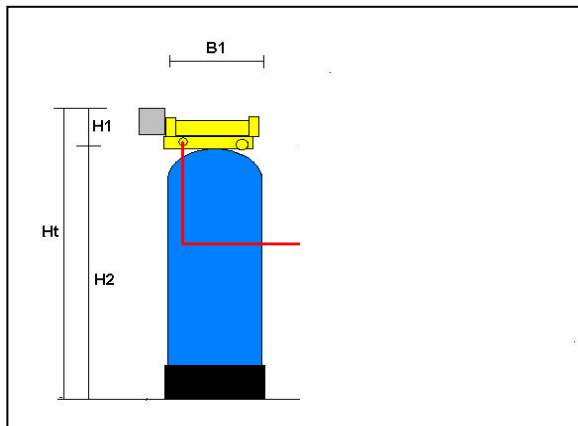

CONTENT

- Resin bottle filled up till 60 %
- Bottom layer with gravel
- Second layer with birm

Article	valve H 1	Bottle H 2	Height Ht	Bottle B1
LOIRIQ.B.42.1344	19	112	131	33
LOIRIQ.B.56.1354	19	138	157	33
LOIRIQ.B.70.1465	19	165	184	36
LOIRIQ.B.98.1665	19	165	184	41